# **VE4** Light Duty Housing Tie


Data sheet
Issue Date:
September 2023


## Masonry to Masonry Wall Ties

These products act to secure two leaves of a cavity wall to each other, allowing them to act as one structurally. A cavity tie usually incorporates some mechanism, (usually a change of shape) to discourage moisture moving across the tie. Most cavity ties are available with a dedicated clip to secure insulation (usually in sheet form) within the cavity.





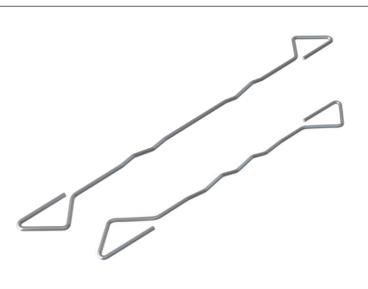

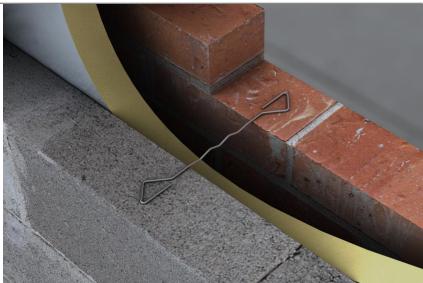

#### **Product**

## VE4 Light Duty Housing Tie

The VE4 comes in two styles. The first has a multi-drip in the middle of the tie, while the second has two offset double drips placed apart. This second style is intended for walls with larger cavities ensuring the drip sits in the clear cavity. The double-drip style is only available for the 275mm tie. The drip features prevent moisture from traveling across the cavity. Both designs allow them to be installed in either orientation. The VE4 is classified as a Type 4 tie, permitting a maximum building height of 10 meters. It is suitable for flat sites with a basic wind speed of under 25 m/s and an altitude below 150 meters above sea level. It is classified as a Type A tie, meaning it is suitable for party or external walls.

CODE	LENGTH	CAVITY	UNITS
VE4-200-STST	200mm	50-75mm	250 Box
VE4-200-50BAG	200mm	50-75mm	50 Bag
VE4-225-STST	225mm	76-100mm	250 Box
VE4-225-50BAG	225mm	76-100mm	50 Bag
VE4-250-STST	250mm	101-125mm	250 Box
VE4-250-50BAG	250mm	101-125mm	50 Bag
VE4-275-STST	275mm	126-150mm	250 Box
VE4-275-50BAG	275mm	126-150mm	50 Bag

Head Office: BPC Building Products Ltd, Flanshaw Way, Wakefield WF2 9LP Tel: 01924 364794

web: www.bpcfixings.com email: sales@bpcfixings.com





Data sheet
Issue Date:
September 2023

### **Testing**

Tested as a Type 4 (Strength) tie.

275mm, 250mm, 225mm & 200mm long stainless steel Wall Ties were tested in tension and compression over a nominal cavity width of 150mm, 125mm, 100mm & 75mm respectively in accordance with BS EN 846-6 Methods of Test for Ancillary Components for Masonry. Part 5; Determination of tensile and compressive load capacity and load displacement characteristics of wall ties (Couplet test).

#### Summary of Declared Values:

Load Direction	Maximum Declared Value at Ultimate load (N)			
275mm				
Tension	1640			
Compression	380			
250mm				
Tension	1580			
Compression	480			
225mm & 200mm				
Tension	1256			
Compression	557			

#### Tested as a Type A (Sound) tie.

The VE4 stainless steel wall ties, measuring 225mm, 250mm, and 275mm in length were independently tested across working cavity widths of 75mm, 100mm, 125mm, and 150mm, respectively. The testing evaluated their dynamic stiffness using the methodology outlined in BRE Information Paper IP 3/01: "Dynamic Stiffness of Wall Ties Used in Masonry Cavity Walls: Measurement Procedure."

Length	Cavity	No. (ties/m²)	Measured dynamic stiffness MN/m <sup>3</sup>
275mm	150mm	2.5	4.0
250mm	125mm	2.5	1.7
250mm	100mm	2.5	3.3
225mm	75mm	2.5	2.77

These tests confirm that VE4 has a dynamic stiffness of  $<4.8 \text{ MN/m}^3$  when installed at a standard spacing of  $2.5 \text{ ties/m}^2$  and are therefore suitable for party walls. They are classed as a Type A tie in Part E. Therefore, our VE4 tie meets the robust detail requirements. Contact the Vista technical team for the measured dynamic stiffness of an individual tie.

#### **Additional Information**

BBA Approved light duty housing ties (Agrément Certificate: 17/5462).

Material - Manufactured from grade 304 stainless steel.

Behaviour in relation to fire - Non combustible (as defined in the national Building Regulations).

Durability – Excellent corrosion resistance and a service life of not less than 60 years.

Compliance – Tested as Type A (sound) and as Type 4 (strength) to BS EN 845-1.

Head Office: BPC Building Products Ltd, Flanshaw Way, Wakefield WF2 9LP Tel: 01924 364794

web: www.bpcfixings.com email: sales@bpcfixings.com

