


Drylining Beads

These beads provide the plasterer with the ability to produce true straight edges in drylining applications and give an excellent key for thin coat (skim) plastering. The fixing of all these products is simple and the beads give good resistance to cracking, chipping and impact damage on corners and edges.

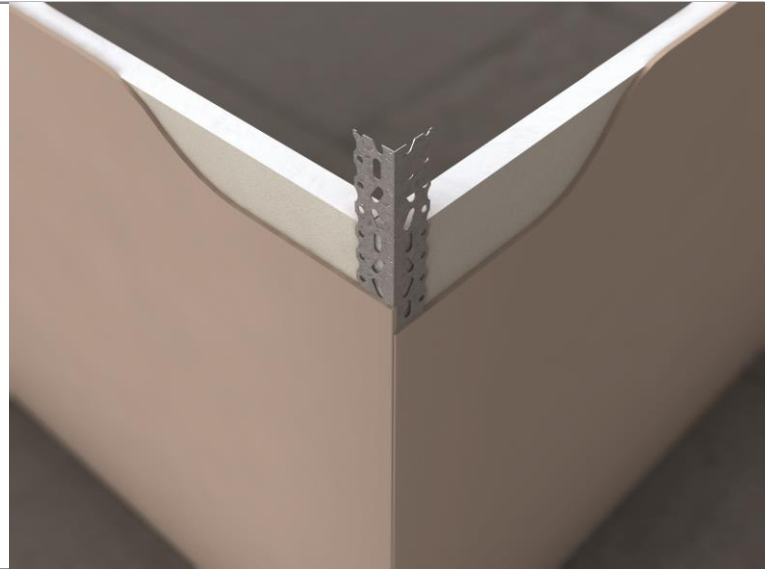

Product

GPTCLW Galvanised Perforated Thin Coat Bead Wide Wing

A thin coat bead for plaster skimming on plasterboard lined walls with wide wings to give a deeper plaster key. Plaster depth 2/3mm. The GPTC has nail holes for easy fixing with drywall nails and a scalloped edge for an excellent plaster key.

Manufactured to BS6452 Part 1: 1984
Installation as BS EN 13658-1:2005
Material conforms to BS EN 10346:2009 DX51D+G274

Internal use only.

Sizes	Per Box:
2.4m x 25mm wing	50 lengths
3.0m x 25mm wing	50 lengths

Safety Precautions

GPTCLW Galvanised Perforated Thin Coat Bead Wide Wing is manufactured from sheared plate and strip so may contain sharp edges. Suitable personal protection should always be used when handling/installing these products.

Storage & Protection

To prevent distortion and damage the GPTCLW bead should be kept dry and stored above the ground on a flat surface.

Any potential corrosion in galvanised beads will only become apparent during the initial drying out period of the plaster or during periods of dampness and heavy condensation. The drying out period (which should be a maximum of 5-7 days) should be kept to a minimum.

Our GPTCLW should be fixed using galvanised mechanical fixings at a maximum of 600mm intervals.