
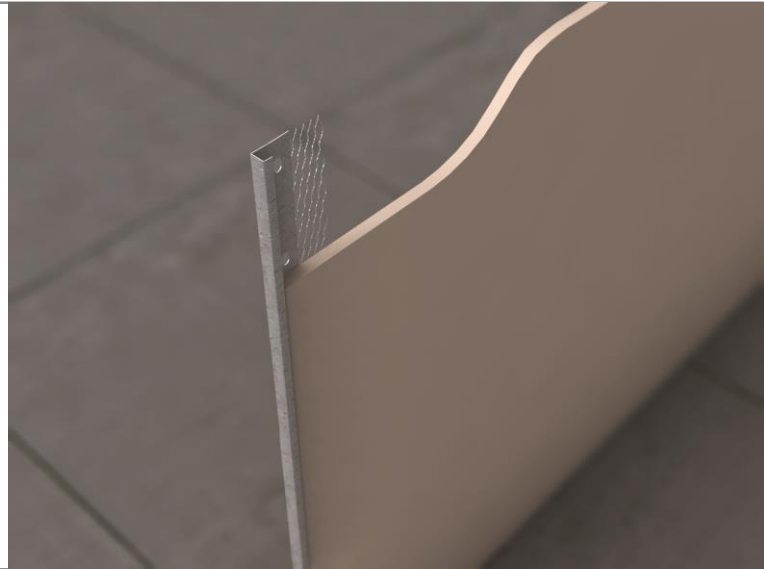


## Plaster and Render Beads

These beads are designed to give true corners and edges to plaster and render where thick or 'rough' coats are required. Fixing is easy using plaster dabs or galvanised nails (with galvanised beads) and the mesh wings provide resistance to cracking while offering a good key to the plaster or render.

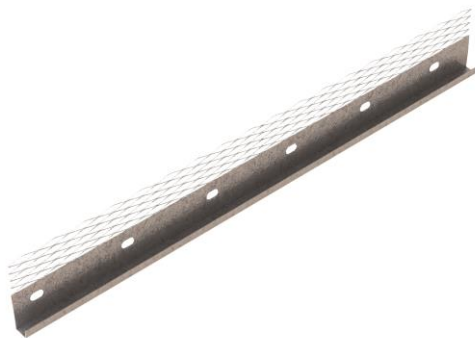

### Product

#### GPS Galvanised Plaster Stop Bead

Galvanised Plaster Stop bead provides a straight and clean edge to wet plaster where it butts up to other materials such as door and window frames. Fixed with plaster or mortar dabs or can be nailed.

Generally for internal use only.

Available in galvanised steel grade DX.51. Z275g to BS EN 10346:2009

Manufactured to BS EN 13658-1: 2005

Sizes		Per Box:
2.4m x	10mm, 13mm, 16mm, 19mm	50 lengths
2.7m x	10mm, 13mm, 16mm, 19mm	50 lengths
3.0m x	10mm, 13mm, 16mm, 19mm	50 lengths

### Storage & Information

To prevent distortion and damage the GPB bead should be kept dry and stored above the ground on a flat surface.

Any potential corrosion in galvanised beads will only become apparent during the initial drying out period of the plaster or during periods of dampness and heavy condensation. The drying out period (which should be a maximum of 5-7 days) should be kept to a minimum.

#### Safety Precautions

GPS# Galvanised Plaster Stop Bead is manufactured from sheared plate and strip so may contain sharp edges. Suitable personal protection should always be used when handling/installing these products.