


External Beads

These beads are generally for use with external renders or areas where there is high moisture/humidity or where applying a polymer modified or sand/cement finish. The mesh wings provide an excellent mortar key and the solid edges true straight arises, corners and finishes to render runs. Fixing is generally by mortar dabs or stainless steel nails or staples. Galvanised fixings should not be used to avoid bi-metallic reactions which may cause rust spots.

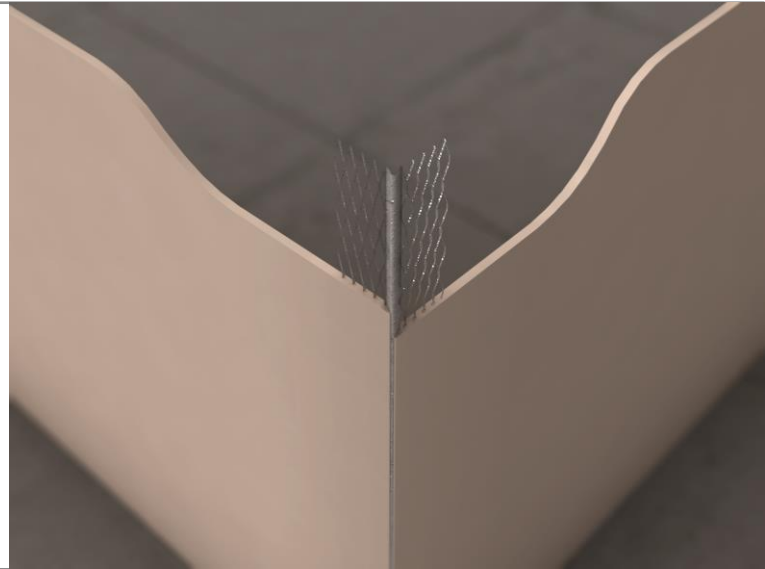

Product

SPS Stainless Steel Plaster Stop

Provides a straight and clean edge to render where it butts up to other materials such as door and window frames. Fixed with mortar dabs or can be nailed using stainless steel fixings.

Available in Stainless Steel BS EN 14016

Sizes	Per Box:
3.0m x 10mm, 13mm, 16mm, 19mm	50 lengths

Storage & Information

To prevent distortion and damage the SAB bead should be kept dry and stored above the ground on a flat surface.

Any potential corrosion in galvanised beads will only become apparent during the initial drying out period of the plaster or during periods of dampness and heavy condensation. The drying out period (which should be a maximum of 5-7 days) should be kept to a minimum.

Safety Precautions

SAB Stainless Steel Angle Bead is manufactured from sheared plate and strip so may contain sharp edges. Suitable personal protection should always be used when handling/installing these products.