


## Movement Ties

This range of ties allow masonry walls to be tied Back to steelwork providing restraint in one direction but allowing movement in the other. This is achieved by placing a debonding sleeve over the part of the tie which is to be embedded in the wall allowing the tie to move within the sleeve. The ties span over a vertical joint preventing vertical movement but allowing horizontal expansion and contraction.

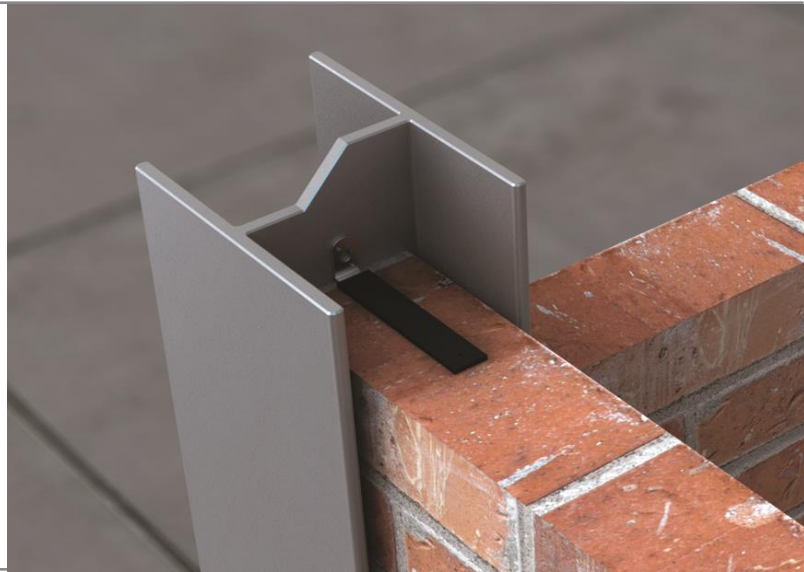

## Product

### V7PE Plain End Frame Tie

Used for restraining masonry to steelwork whilst allowing lateral movement. (Sleeve supplied as extra).

Each size is supplied with 250 units per box.

Sizes: 75, 100, 125, 150, 175, 200, 225, 250, 275, 300mm

## Performance

V7PE 75mm-300mm	
Shear Load Capacity	<b>1180N*</b>
Minimum Mortar Joint	<b>10mm</b>

\*the stated shear load capacity is based on a 10mm gap between structure and masonry.

### Safety Precautions

V7PE Plain End Frame Cramps are manufactured from sheared plate and strip so may contain sharp edges. Suitable personal protection should always be used when handling/installing these products.