

## Identification Code: VE7 75mm-300mm


Meeting the requirements of Annex ZA, EN 845-1:2013+A1:2016

### Description of Use:

Asymmetrical movement tie used to connect new masonry to an existing structure maximum cavity of 10mm.

**Testing Body:** Lucideon Ltd  
Queens Road  
Penkull  
Stoke on Trent  
ST4 7QL

**Notification Body No:** 1289

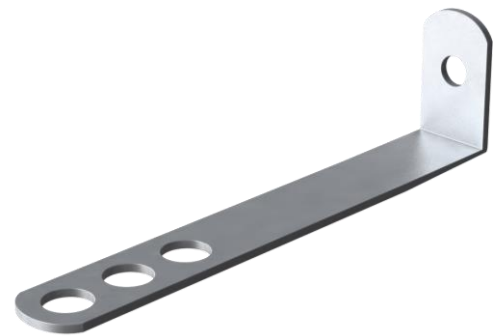

### Performance:

<b>Shear Load Capacity:</b>	1180N*
<b>Displacement at <math>\frac{1}{3}</math> Load:</b>	0.49mm*
<b>Durability:</b>	Material coating reference 3
<b>Dangerous Substance:</b>	N/A
<b>Minimum Embedment:</b>	62.5mm
<b>Minimum Mortar Joint:</b>	10mm

\*the stated shear load capacity is based on a 10mm gap between structure and masonry.

Authorised Signature



Philip Travis, Managing Director

1<sup>st</sup> June 2023

